


**AVCS
Series**



AVCS

AVCS-100 Central Station Digital Receiver

**Simple and friendly two lines CS alarm receiver
Interfaced to PC for turning into professional
central station monitoring desk
Built-in PSTN line monitor**

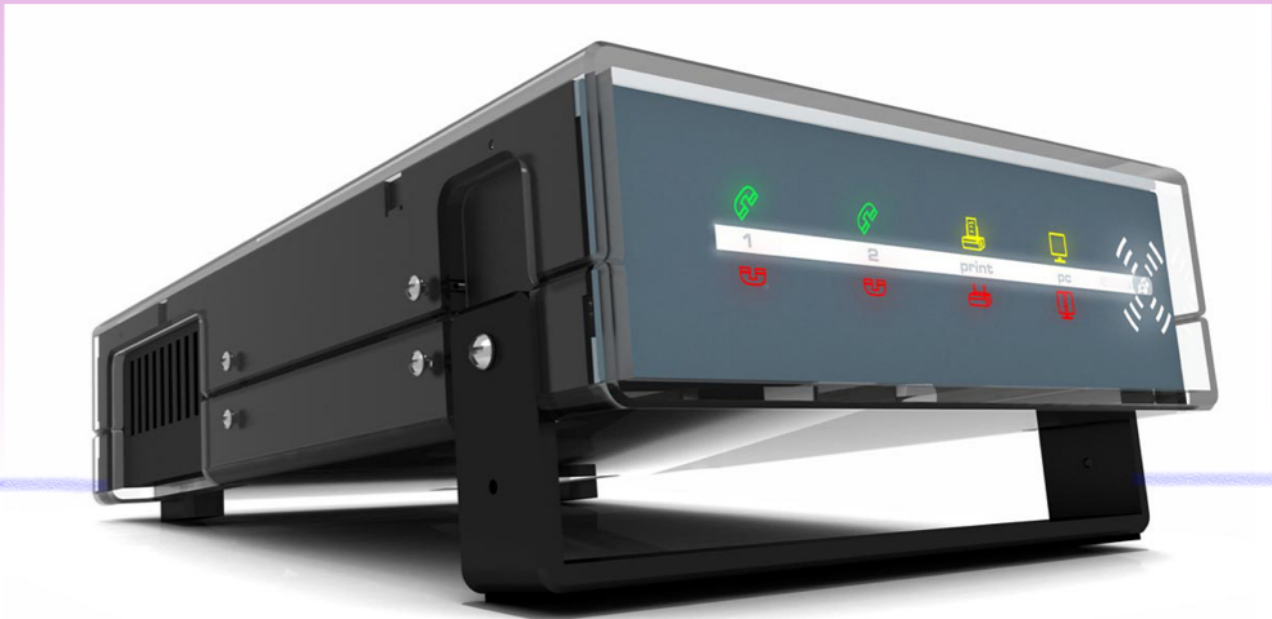

Supports Pulse, DTMF and FSK formats. Supplied with two RJ11 type jacks for telephone line connection. Printer and USB for PC connection, nine status LEDs. Supports 10,000 accounts

Main Features:

Supports most CS formats:

Acron, Ademco formats: Slow/Fast, Contact ID, Extended, Express, BFSK, CFSK, VFSK Napco Point ID, Radionics 6500, Radionics extended, Sescoa Slow, Super Fast, SIA, Silent Knight Slow, FBI Super fast and more
Transmission formats: 3x1 extended, 4x1 extended, 4x2 in certain versions

Ready for PC interfacing

Printer Output: Standard DB25 connector for Parallel Interface
Event Logging when PC fails: Stores last 1800 events (Contact ID, no caller ID) when PC is down. Resumes sending when PC restored

Operating system (all with Java): Windows 2000, XP, Vista and latest Windows 7. Supplied without CS software

Requires 12V, battery is optional, equivalent to exsa receiver.
It's recommended to setup two receivers, the 2nd as emergency backup.



AV-GAD
systems ltd.